

Topic: IPI Pipe Sample MOLI Test Results

Requesting: IPI International Plastic Industry Sarl

** This document has been created to report the technical analyses of samples sent at the request of our customer.*

*** We hereby declare that, should this document be presented to the competent authorities, no representations have been made in accordance with accredited international standards, and it has been issued solely for the purpose of sharing the test results of the samples.*

Dear Sir/Madam,

The results of the physical property analyses performed on pipe sample MOLI, which was received from your company, are as follows;

Properties	Pipe Sample MOLI
Diameter, cm	15,9
Length, cm	12
Density, g/cm ³	1,615
Mass, g	337,4
Thickness	3,8
Kg/Meter	2,808

As an information, because of the length of sample was too short for the Tensile Strength testing device, test could not be performed for sample.

Also, 2000 hours QUV Resistance results can be seen in the next page.

For your information,

Best Regards,

Oğuz ÖREN

Product Specialist

 Akdeniz Chemson	Q.U.V. ACCELERATED WEATHERING TEST REPORT	Report No : 2025 - 150 Date : 22.12.2025
--	--	---

Customer Name : IPI LEBANON PIPE

Name of Sample : IPI MOLI

Weathering Equipment :	Q.U.V. Accelerated Weathering Tester	Cabin Temperature :	50° (light cycle) / 45°C (dark cycle)
Light Source :	UVA 340 Lamp	Glossmeter :	Sheen® / TRI - Microgloss
Cycle Period :	8 hours light cycle / 4 hours dark and condensation	Spectrophotometer :	X-Rite® SP88 D6510 / Sphere Included



Starting Date of Test : 8.08.2025

Finish Date of Test : 6.11.2025

Exposure period : 2000 HOUR

Report Date : 22.12.2025

	0	250	500	750	1000	1250	1500	1750	2000
L	48,43	48,24	46,41	44,64	47,48	46,85	48,81	46,12	53,08
a	33,68	33,23	30,62	29,62	28,38	28,12	23,50	26,74	18,63
b	31,00	29,88	27,28	26,63	25,36	26,13	10,92	24,92	19,07
ΔE	0,00	1,22	5,22	7,07	7,80	7,56	22,52	9,51	19,76
Gloss	16,00	18,00	16,00	13,00	16,00	9,00	8,00	10,00	4,0

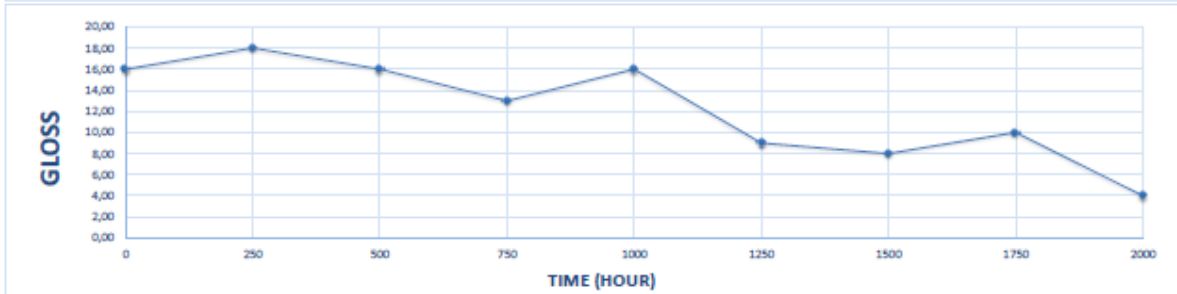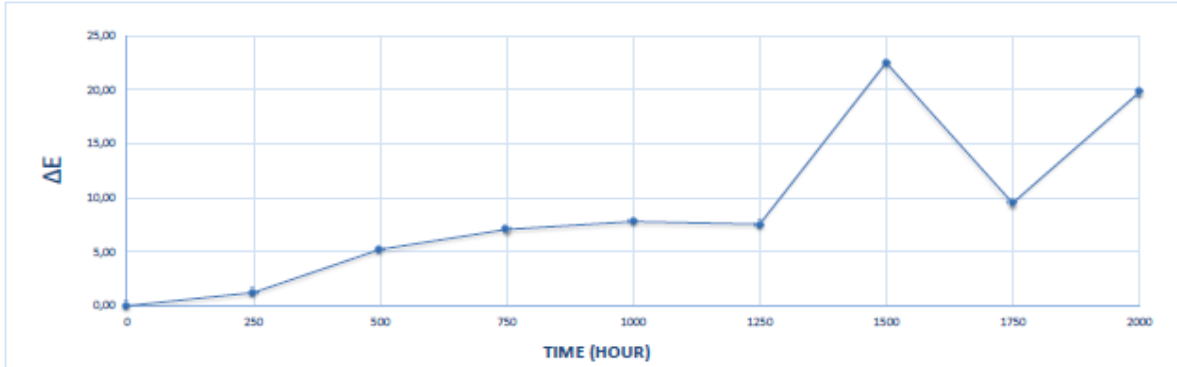

Tested By	Göleymen SAYAN	Approval By	Aytaç ŞAHİN
-----------	----------------	-------------	-------------

NOTE :

1. Weathering Test is realized according to ASTM G53-88 standard
2. All measurements are arithmetic mean of 5 data

Rev. No/Tarihi:01/23.11.2010

KAG.FR 007

Yayın Tarihi: 09.11.2004



KİMYA

Akdeniz Chemson Kimya San. Tic. A.Ş.

Kemalpaşa O.S.B. Mah. İzmir-Kemalpaşa Asfaltı Cad. No:45 35735 Kemalpaşa / İZMİR / TÜRKİYE

Tel: +(90) 232 877 01 44 Fax: +(90) 232 877 01 50

www.akdenizchemson.com